

# YAESU


The radio

## Information for the Customers who Operate the FT-450D in the UK

Thank you very much for purchasing the YAESU FT-450D.

Please be informed that the TX frequency range of the FT-450D transceiver is 1.8 MHz - 52 MHz (amateur bands only) but does not include 5 MHz (60 m) band. If you would like to operate this radio in 5 MHz (60 m) band, please follow the procedure below before using the transceiver for the first time.

1. Turn the transceiver OFF.
2. Press and hold in the [A/B] button while turning the transceiver ON. Setting Number "3" will appear in the display.
3. Rotate the [MAIN DIAL] knob and select the Setting Number "4".
4. Press and hold in the [MODE▲] button to store the Setting Number "4" and the radio re-starts automatically.  
Setting for 5 MHz (60 m) band is successfully completed.

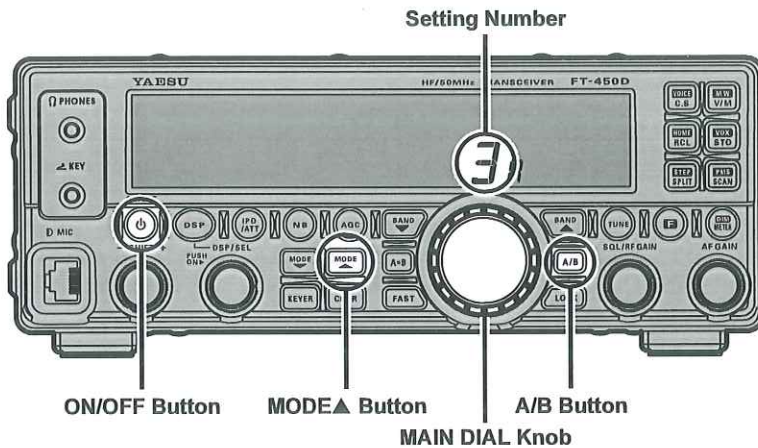

### **Caution:**

**NOTE:** By adding 5 MHz (60 m) band as the operable frequencies according to the procedures above, all saved data such as Menu and Memory settings will be deleted. If you need to add 5 MHz (60 m) band after using the radio, make sure to back up your registered data or write it down before you execute this setting change.

**NOTE:** 5 MHz (60 m) band setting is NOT disabled even after executing the "Full Reset" to restore the transceiver to the factory defaults according to Page 18 of operation manual.

